


Fox - Front Access External Cabinet.

KEY FEATURES

- Front access.
- Fully adjustable vertical rails front and rear.
- Doors complete with 3-point lock and secondary security lock system.
- Apex roof.
- Large open base entry.
- Fully welded construction.
- Fully vented complete with 3-fan assembly.
- Also available in 304 or 316 stainless.
- Available in Black, Green or Grey as standard, other colours available on request.
- IP65 rated.
- Base bolt hole on all four sides, M20.

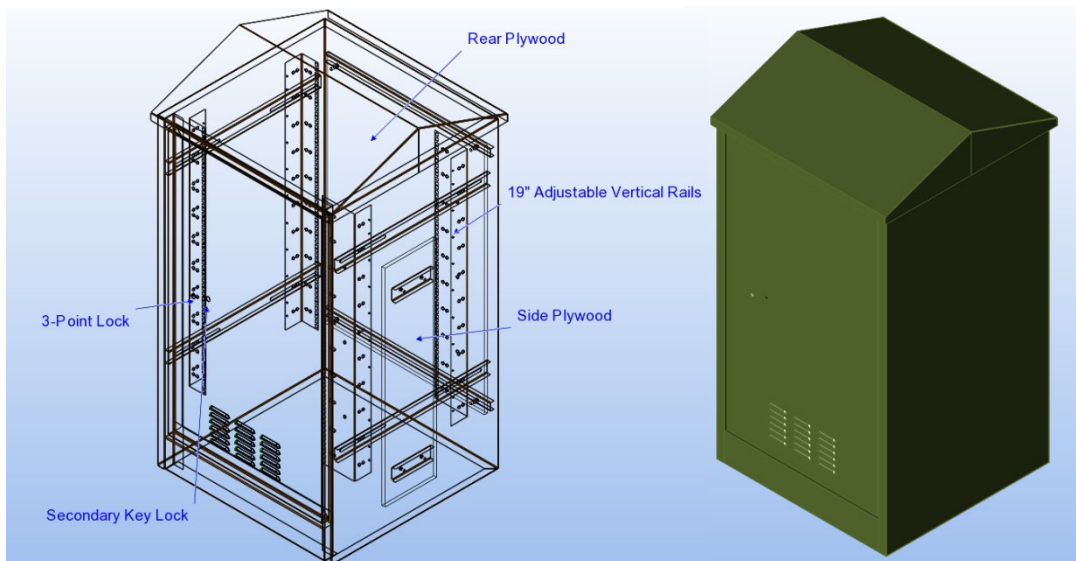

Available Dimension

Height (mm)	Width (mm)	Depth (mm)	Capacity
1000	675	450	15u
1000	675	650	15u
1300	675	650	20u
1300	675	650	24u
1300	675	800	20u
1300	675	800	24u
1750	675	650	30u
1750	675	650	34u
2150	675	650	42u
2150	675	800	42u

FDMS 650 Front Access Cabinets are designed for external use, manufactured from 2mm thick 4003 stainless, the fully welded Construction ensures the Cabinets are robust and suitable for heavy-duty applications.

The fully adjustable rail system allows the 19" vertical rails to be fitted at the front and rear of the cabinet which can be set by the customer offering a wide range of depths for equipment mounting.

FDMS 650 Front Access Cabinets are supplied with a 13mm thick plywood backboard as well as a set of 19" vertical rails Front and Rear, complete with cable management fitted along the side of the righthand vertical rails.

Ventilation is provided through louvres manufactured within the front lower sections of the doors. The cabinets are supplied with three thermostatically controlled fans in the roof with all extraction points protected with mesh screen to prevent against vermin and insects.

FDMS 650 Cabinets are designed to bolt directly to a concrete slab, increased height can be achieved for the likes of battery storage by adding a plinth.

Cabinet 650 Front access comes complete with 3-point locking secured by a secondary security key lock, as a single module it is part of a much larger family of our cabinets, please refer to our website www.fdns.co.uk for details.

Special Bespoke sizes also available to customer requirements.